PRODUCT SPECIFICATIONS

Model No: SE616

PRATT COMBINATION SHOWER WITH SINGLE NOZZLE EYE WASH WITH BOWL. NO FOOT TREADLE

This combination model is constructed mainly of 304 stainless steel, with 316 stainless steel ball valves and threaded components, and AES plastic eye wash nozzles with a single aerator and dust cap. It is suitable for both indoor and outdoor applications.

The shower outlet also includes a 90LPM flow regulator, and the eye wash incorporates individual flow adjustment to provide a balanced flow output



E: prattcs@paramountsafety.com.au **E:** nz@prattsafety.co.nz

www.prattsafety.com.au www.prattsafety.co.nz

PRODUCT SPECIFICATIONS S Y S T E M S

1

Model No: SE616

17

5

11


PRATT COMBINATION SHOWER WITH SINGLE NOZZLE EYE WASH WITH BOWL. NO FOOT TREADLE

TECHNICAL DRAWINGS AND SPARE PARTS

SPARE PARTS COMPONENTS:


SAFETY

STARETARTS COMPONENTS.			
ITEM	PART NO.	DESCRIPTION	MATERIAL
1	SE870	Shower Head	AES Plastic
2	531038	Pull Rod	304SS
3	531144	Shower Arm	304SS
4	SE911	25mm Ball Valve & Lever Arm	316SS / 304SS
5	531128	Upper Shower Stanchion	304SS
6	531039	Lower Shower Stanchion	304SS
7	531018	15mm Ball Valve	316SS
8	511328	Manifold T Assembly	316SS
9	531108	Bowl Assembly	304SS
10	531020	Push Handle	304SS
11	520130WH	Left Braided Hose & Elbow Base	304SS
12	520129WH	Right Braided Hose & Elbow Base	304SS
13	511700	Screen Filter Mesh (pk 6)	304SS
14	531130	Eye Wash Nozzles (complete)	AES Plastic
15	05-1177	Aerator Screen Assembly (ea)	SS & Brass
16	531113	Dust Cover	AES Plastic
17	PFCA90	Flow Regulator & Housing	Acetyl / Polypropylene
18	531121	Drain Spud Connector & Hex Key	316SS



885


Feli

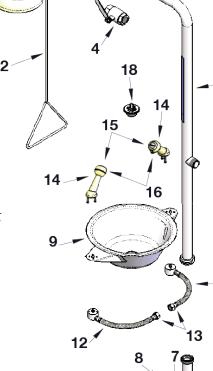

3



Inlet and Outlet Connections: 25mm BSPM **Recommended:** Minimum Supply Connection: 25mm Minimum Water Supply: 120-130 LPM @ 210kPa

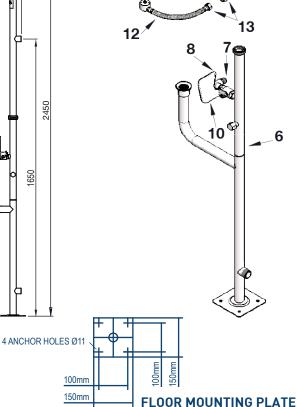

AUSTRALIA **T:** 1300 133 226

NEW ZEALAND

E: prattcs@paramountsafety.com.au **E:** nz@prattsafety.co.nz

T: 0800 133 226

www.prattsafety.com.au www.prattsafety.co.nz