

# FREE STANDING EYE FACE WASH HAND/FOOT OPERATED - STAINLESS STEEL

Enware's eye/face washes flush hazardous contaminants and irritants from eyes and facial area. Independently tested to comply with Standards ANSI Z358.1 and AS 4775. Stainless steel construction for superior durability and reliability, choose powder coated for extra chemical resistance.

### Key features


- ✓ Hand or foot activated with dedicated eyewash and independently angled face wash streams for optimum coverage
- ✓ Zero velocity apex point provides more comfort and control for effective cleansing of eyes and face
- ✓ Stainless steel bowl, hand and foot actuator and stay open ball valve
- ✓ Self-draining design reduces bacteria risk, particularly in tepid water applications
- ✓ High visibility yellow powder coated push handle and foot pedal
- ✓ Designed and made in Australia



### PRODUCTS

Product code	Line description
EFE390	Brushed Stainless Finish
EFE390GR	Powder Coated Finish - GREEN
EFE390OR	Powder Coated Finish - ORANGE
EFE390WH	Powder Coated Finish - WHITE
EFE390YE	Powder Coated Finish - YELLOW

### DIMENSIONS

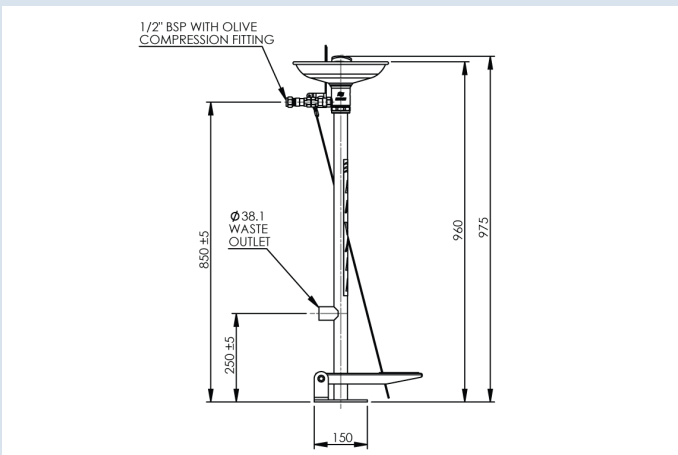

## TECHNICAL INFORMATION

Inlet Connection	15mm (1/2" BSP)
Water Supply Line Size	Must be hydraulically sized to meet requirements
Minimum Performance Requirements - Min Working Pressure	210 kPa
Minimum Performance Requirements - Min Flow Requirements	26 lpm (6.9 US gpm)
Waste Water Outlet Size	38 mm (1-1/2") OD
Mounting Base Plate	Size: 150 x 150 mm (5-9/10" x 5-9/10") with
Shipping	Weight: approx. 9 kg Dimensions: 1160 x 300 x 250 mm

\* Enware products must be installed in accordance with AS4775 - Emergency Eyewash and Safety Equipment, AS/NZS 3500 - Plumbing and Drainage, and the Plumbing Code of Australia (PCA). Installations not complying with AS4775, AS/NZS 3500 and PCA may void the product and performance warranty provisions. The performance of Enware AS/NZS 3718 tapware, in many cases, exceeds the plumbing system design requirements of AS/NZS 3500 and PCA.