

COMBINATION EMERGENCY SHOWERS AND EYE FACE WASH HAND OPERATED - STAINLESS STEEL

Enware's emergency safety showers assist in the rapid removal of contaminants from the body with a deluge of flushing fluid. Combined with an eye and face wash system featuring Enware's Vertex Technology. Independently tested to comply with Standards ANSI Z358.1 and AS 4775. Stainless steel construction for superior durability and reliability, choose powder coated for extra chemical resistance. Alarms and lighting systems for safety showers are available, please contact Enware on 1300 369 273 to ensure the best solution for specific site requirements.

Key features


- ✓ Stainless steel shower head and impeller, pull rod, bowl and stay open ball valves
- ✓ High visibility yellow epoxy coated activation pull rod and push handle
- ✓ Push activated with dedicated eyewash and independently angled face wash streams for optimum coverage
- ✓ Zero velocity apex point provides more comfort and control for effective cleansing of eyes
- ✓ Self-draining design reduces bacteria risk, particularly in tepid water applications
- ✓ Designed and manufactured in Australia



PRODUCTS

| Product code | Line description |
|--------------|-------------------------------|
| ECE240 | Brushed Stainless Finish |
| ECE240GR | Powder Coated Finish - GREEN |
| ECE240OR | Powder Coated Finish - ORANGE |
| ECE240WH | Powder Coated Finish - WHITE |
| ECE240YE | Powder Coated Finish - YELLOW |

DIMENSIONS

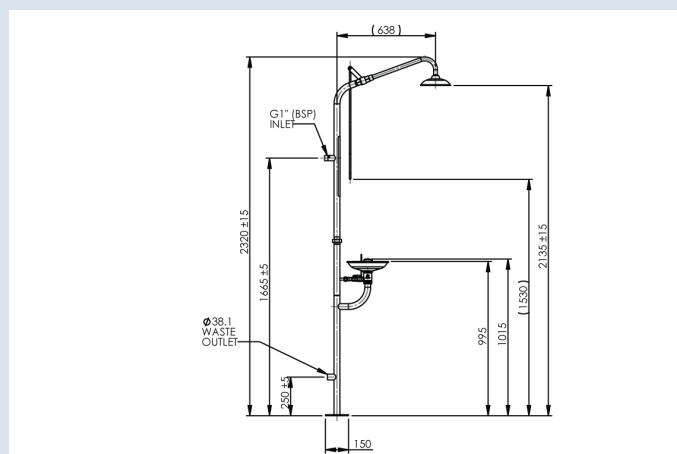

TECHNICAL INFORMATION

| | |
|--|--|
| Inlet Connection | 25 mm (1" BSP) |
| Water Supply Line Size | Supply piping shall be adequately sized to meet flow requirements |
| Minimum Performance Requirements - Min Working Pressure | 210 kPa |
| Minimum Performance Requirements - Min Flow Requirements | 76 lpm (20 US gpm) |
| Waste Water Outlet Size | 38 mm (1-1/2") OD |
| Mounting Base Size | Size: 150 x 150 mm (5-9/10" x 5-9/10") with 4 Bolt Holes 11 mm (7/16") |
| Shipping | Weight: approx. 9 kg Dimensions: 1160 x 300 x 250 mm |

* Enware products must be installed in accordance with AS4775 - Emergency Eyewash and Safety Equipment, AS/NZS 3500 - Plumbing and Drainage, and the Plumbing Code of Australia (PCA). Installations not complying with AS4775, AS/NZS 3500 and PCA may void the product and performance warranty provisions. The performance of Enware AS/NZS 3718 tapware, in many cases, exceeds the plumbing system design requirements of AS/NZS 3500 and PCA.